

A binary message comprised of +1's and -1's





Figure 1

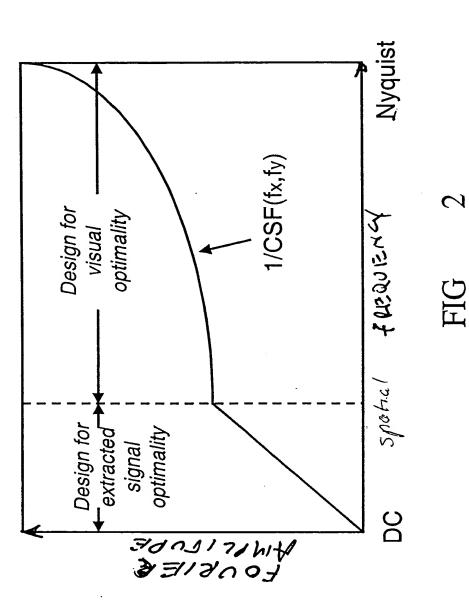

The carrier is designed for extracted signal quality for low spatial frequencies and visual optimality for high spatial frequencies




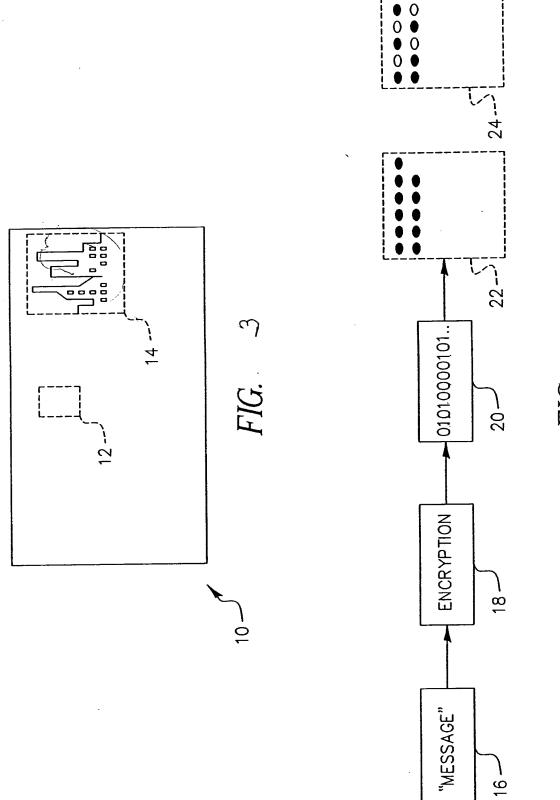


FIG. 4

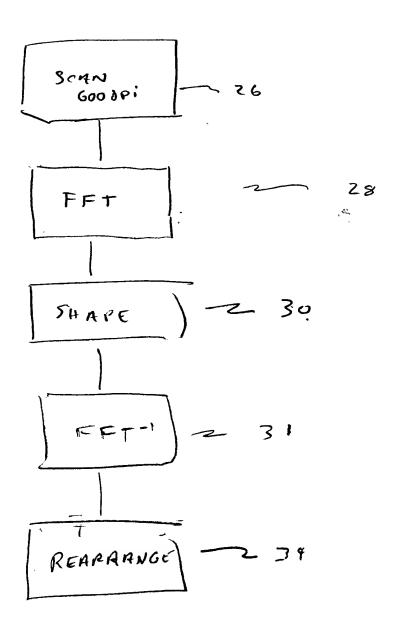

F16 5

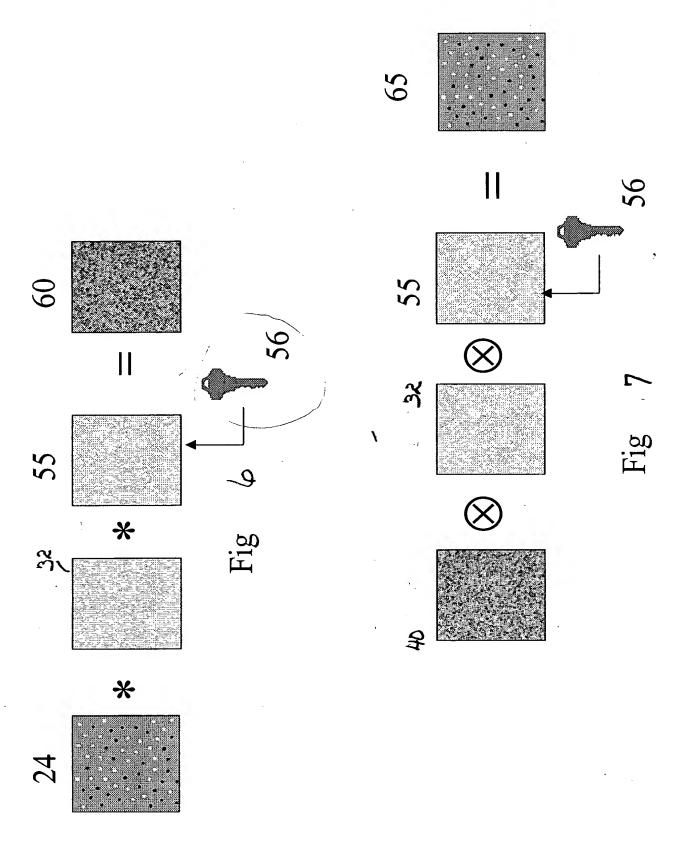

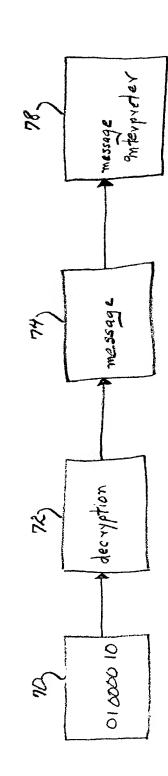

F16 8